



SIDE-LINE

Linear recessed luminaire

Pure flexibility

The SIDE-LINE linear recessed luminaire is the ideal solution for uniform, functional interior lighting of cabinets and furniture. Thanks to the special orientation of the light diffuser, the light is directed precisely into the cabinet, ensuring homogeneous illumination of the interior surfaces. A particular highlight is its use with or without end caps: in combination with the internal Quick Connect power feed, a continuous line of light is created without dark zones - delivering clean, professional lighting solutions down to the very last millimeter. Thanks to UniFeed, SIDE-LINE offers maximum flexibility during installation. The luminaire can be installed on the right or left side, and the power supply can be fed from the top or bottom—simply by repositioning the Quick Connect power feed, without regard to polarity.

Scope of delivery

- Linear recessed luminaire with 2000 mm connection cable
- Mounting clips (3 x 1500 mm version, 5 x 2500 mm version)



Accessories (optional)

Lighting assembly kit consisting of:

- 1 x Quick-Connect feeder with 2000 mm connection cable
- 2 x End caps
- 2 x Mounting clips



Light connector




Corner connector Linear connector

Produkt features

- Voltage: 12 volt
- Power: 10 watt per meter
- Light output: 900 lm / meter
- Light color: warm white (3000K)
- Color rendering index: (CRI) >90
- Beam angle: 120°
- Lifespan (t70): 20.000 h
- UniFeed feed-in (left or right)

| Article | mid grey, warm white |
|--|----------------------|
| SIDE-LINE E L=1500mm, 15 watt | 519543 |
| SIDE-LINE E L=2500mm, 25 watt | 519545 |
| Lighting assembly kit | 526233 |
| Article | black, warm white |
| SIDE-LINE E L=1500mm, 15 watt | 519544 |
| SIDE-LINE E L=2500mm, 25 watt | 519546 |
| Lighting assembly kit | 526234 |
| Article | PU 20 piece |
| Corner connector (TOP-LINE, SIDE-LINE) | 506805 |
| Linear connector (TOP-LINE, SIDE-LINE) | 506806 |

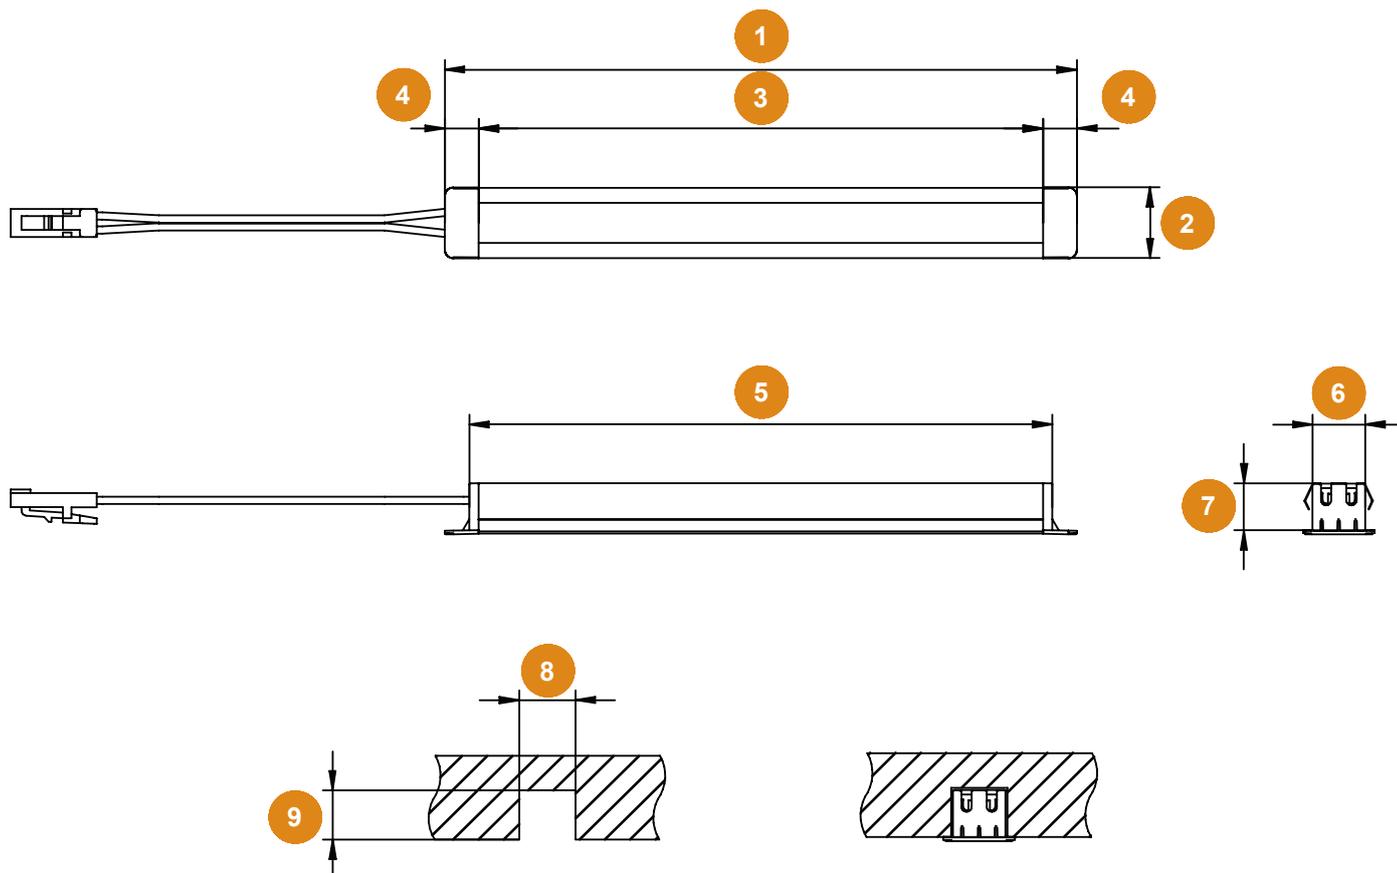

Dimensions

| Description | Measure |
|--|----------------------------|
| 1. Length of the entire luminaire | |
| Article number 519543, 51944 | 1500 mm |
| Article number 519545, 519546 | 2500 mm |
| 2. Width of the luminaire | 11,5 mm |
| 3. Length of the light profile | |
| Article number 519543, 519544 | 1494 mm |
| Article number 519545, 519546 | 2494 mm |
| 4. Length of end cap | 3 mm |
| 5. Length of the milling groove | Length of luminaire - 6 mm |
| 6. Width of the light profile (without mounting clip) | 9,2 mm |
| 7. Height of the light profile (without mounting clip) | 8,5 mm |
| 8. Width of the milled groove (with mounting clip) | 10 mm |
| 9. Depth of the milled groove (with mounting clip) | 9,5 mm |