



TOP-LINE

Linear recessed luminaire

Pure minimalism

The TOP-LINE linear recessed luminaire stands for maximum design freedom combined with uncompromising aesthetics. Thanks to FreeCut, the luminaire can be cut to length with millimeter precision at any desired position - perfect for customized installation situations. UniFeed makes installation easier than ever: the Quick Connect power feed works on the right or left side, without any need to consider polarity. The absolute highlight is the internal Quick Connect power feed, which allows operation without end caps and without dark zones - ensuring a continuous, homogeneous line of light down to the very last millimeter. Despite its minimalist dimensions, there are no visible LED spots, even when dimmed.

Scope of delivery

- Linear recessed luminaire with 2000 mm connection cable
- Mounting clips (3 x 1500 mm version, 5 x 2500 mm version)



Accessories (optional)

Lighting assembly kit consisting of:

- 1 x Quick-Connect feeder with 2000 mm connection cable
- 2 x End caps
- 2 x Mounting clips



Light connector




Product features

- Voltage: 12 volt
- Power: 10 watt per meter
- Light output: 900 lm / meter
- Light color: warm white (3000K)
- Color rendering index: (CRI) >90
- Beam angle: 120°
- Lifespan (t70): 20.000 h
- UniFeed feed-in (left or right)

Article	mid grey, warm white
TOP-LINE E L=1500mm, 15 watt	519539
TOP-LINE E L=2500mm, 25 watt	519541
Lighting assembly kit	526231

Article	black, warm white
TOP-LINE E L=1500mm, 15 watt	519540
TOP-LINE E L=2500mm, 25 watt	519542
Lighting assembly kit	526232

Article	PU 20 piece
Corner connector (TOP-LINE, SIDE-LINE)	506805
Linear connector (TOP-LINE, SIDE-LINE)	506806

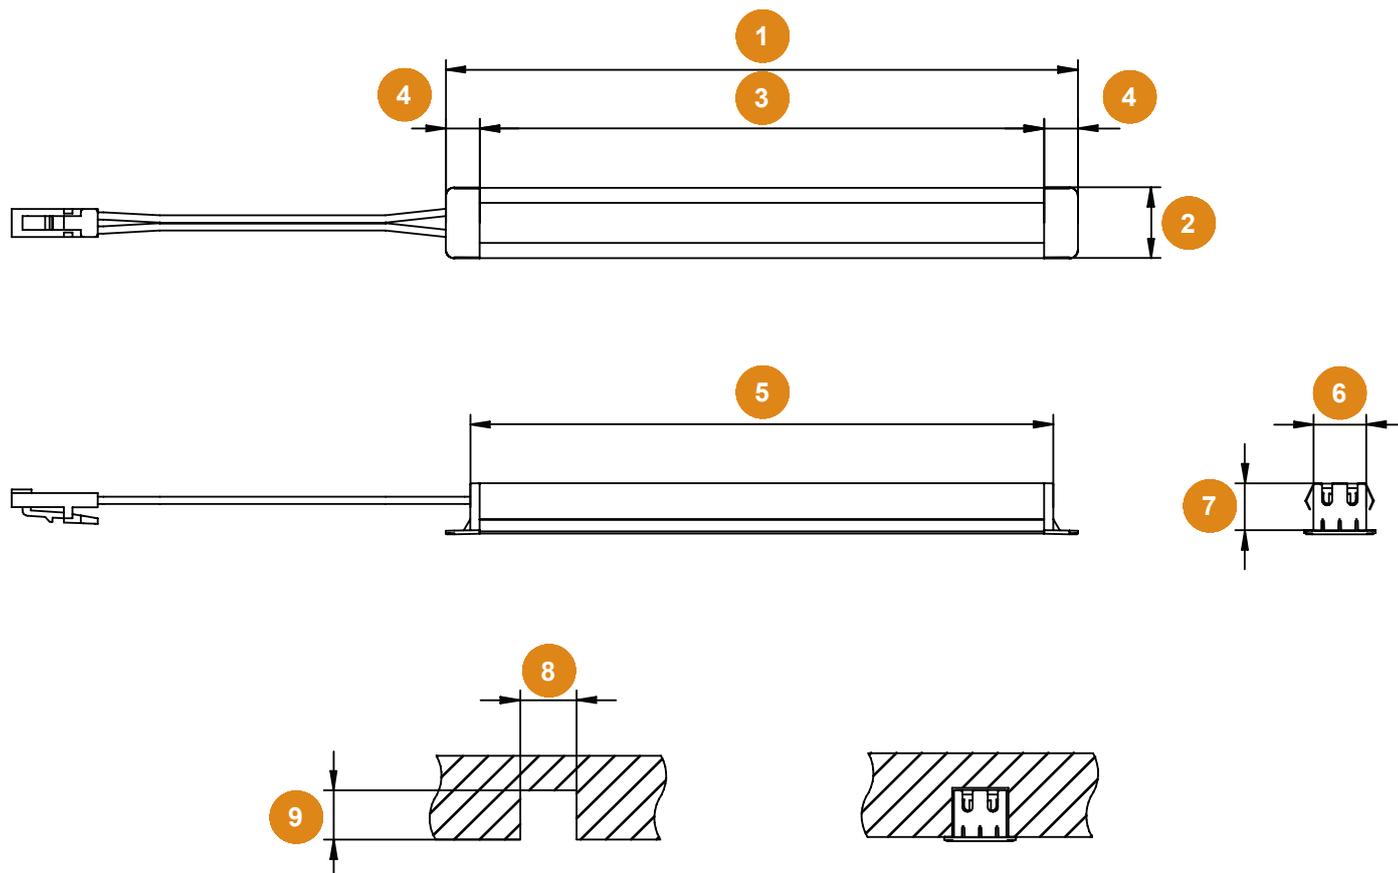

Dimensions

Description	Measure
1. Length of the entire luminaire	
Article number 519539, 519540	1500 mm
Article number 519541, 519542	2500 mm
2. Width of the luminaire	12,5 mm
3. Length of the light profile	
Article number 519539, 519540	1494 mm
Article number 519541, 519542	2494 mm
4. Length of end cap	3 mm
5. Length of the milling groove	Length of luminaire - 6 mm
6. Width of the light profile (without mounting clip)	9,2 mm
7. Height of the light profile (without mounting clip)	9,2 mm
8. Width of the milled groove (with mounting clip)	10 mm
9. Depth of the milled groove (with mounting clip)	8,8 mm